



WIRES & CABLES PRODUCT LIST

AN ISO 9001 CERTIFIED COMPANY



An award winner of
quality mark in 2016

CABILEX[®]
Cables Pvt.Ltd.

Cables you can trust...



About Us

- Cabilex Cables Pvt. Ltd. is established in the year 2014.
- The company is manufacturing various range of cables and wires like single core wire, two core cable, three core cable, four core cable, submersible cable, power cable, welding cable, house wires using high quality of copper & aluminum.
- The company has modern infrastructure with Hi-technology machineries and testing facilities.
- Cabilex is certified with ISO 9001 by TUV India for its excellent management system.
- Cabilex provides ECO - friendly environment and safety for their workforce.
- Cabilex is equipped with latest testing laboratory for R & D quality of raw materials and finished goods.

VISION

Customer service & satisfaction as well as quality product.

MISSION

Our mission is to achieve largest distribution network with best product & also at most competitive price.

QUALITY

TRUST

service

SATISFACTION

RESPONSIBILITY






Index

- House wires FR insulated.
- Industrial single core cables.
- Submersible cables.
- Industries flexible round copper cables.
- N.B.R. coated & H.O.F.R. insulated welding Cables.
- Aluminum flat & round PVC insulated power cables.



In House Draw System

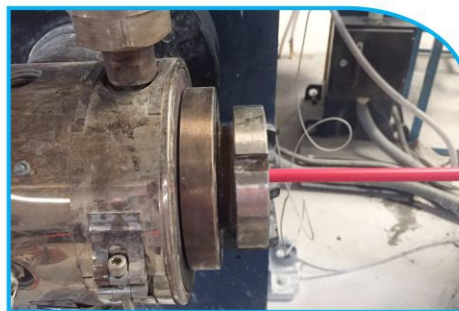

Three Layer Coating Machine



Bright Annealed Electrolytic System



Hi-tech Lab



In House PVC Compounding



Largest Stock Godown

House Wires (Fire Retardant) 90 Meters - Single Core

Multi strand single core unsheathed flexible cables with bright annealed electrolytic copper conductor for voltage grade upto 1100 volts.

Conductor Area (Sq. mm.)	Current Carrying Capacity (AMPS)	Nos & Dia. Of wire	PVC Thickness	Approx. overall Dia.	Price	Master Box Packing
0.50 sq.mm.	5	16/0.20	0.60	2.30	635	20
0.75 sq.mm.	7	24/0.20	0.60	2.50	850	18
1.00 sq.mm.	11	14/0.30	0.60	2.70	1060	15
1.50 sq.mm.	15	22/0.30	0.70	3.20	1680	12
2.50 sq.mm.	20	36/0.30	0.80	3.70	2650	8
4.00 sq.mm.	30	56/0.30	0.80	4.30	4050	8
6.00 sq.mm.	35	85/0.30	0.80	5.20	5750	5



Also Available in 200 mtr. / 300 mtr. For Special Project

Fire Retardant (FR) PVC Insulated Industrial Single Core, Unsheathed Cables In Voltage Grade Upto 1100 Volts.

Conductor Area (Sq. mm.)	Current Carrying Capacity (AMPS)	Nos & Dia. Of wire	PVC Thickness	Approx. overall Dia.	Rate Per 100 mtr. Price
10.00 Sq. mm.	45	142/0.30	1.00	6.50	10580
16.00 Sq. mm.	65	226/0.30	1.00	8.50	17100
25.00 Sq. mm.	85	355/0.30	1.20	10.00	27525
35.00 Sq. mm.	110	496/0.30	1.20	11.00	38250
50.00 Sq. mm.	150	708/0.30	1.40	12.50	55600





Also Available in 500 to 3000 mtr. Drum Packing.

Submercible - 3 Core - Sheathed Flat Cables

PVC insulated three core flat flexible cable for submercible pump with bright annealed electrolytic copper conductor for voltage grade up to 1100volts.

Conductor Area (Sq. mm.)	Current Carrying Capacity (AMPS)	Nos & Dia. Of wire	Approx. overall Dia.		Price Per 1 mtr.
			Height	Width	
1.00 sq.mm.	11	14/0.30	5.30	10.70	41
1.50 sq.mm.	15	22/0.30	5.40	11.00	65
2.50 sq.mm.	20	36/0.30	6.20	13.00	96
4.00 sq.mm.	30	56/0.30	7.10	15.30	150
6.00 sq.mm.	35	85/0.30	8.40	19.20	220
10.00 sq.mm.	45	142/0.30	10.40	24.20	360
16.00 sq.mm.	65	226/0.30	12.40	29.00	575
25.00 sq.mm.	85	355/0.30	15.70	36.50	895
35.00 sq.mm.	110	496/0.30	17.20	40.50	1204
50.00 sq.mm.	150	708/0.30	22.00	52.00	1900

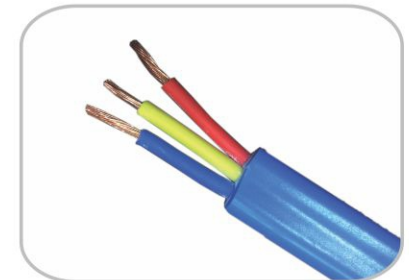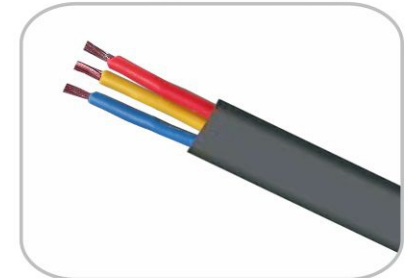

Anti Rodent



Anti Insect

Industrial Flexible Round Cables



Heavy duty PVC insulated bright annealed copper conductor round sheathed multi core industrial power cable for working voltage up to 1100 V. as per IS - 694

Conductor Area (Sq. mm.)	Current Carrying Capacity (AMPS)	Nos & Dia. Of wire	2 - CORE ROUND Price Per Meter	3 - CORE ROUND Price Per Meter	4 - CORE ROUND Price Per Meter
0.50 Sq. mm.	5	16/0.20	20	28	38
0.75 Sq. mm.	7	24/0.20	27	38	44
1.00 Sq. mm.	11	14/0.30	36	46	56
1.50 Sq. mm.	15	22/0.30	50	63	85
2.50 Sq. mm.	20	36/0.30	73	97	125
4.00 Sq. mm.	30	56/0.30	110	150	195
6.00 Sq. mm.	35	85/0.30	158	225	310
10.00 Sq. mm.	45	142/0.30	225	360	475
16.00 Sq. mm.	65	226/0.30	-	580	790
25.00 Sq. mm.	85	355/0.30	-	905	1210
35.00 Sq. mm.	110	496/0.30	-	1230	1700
50.00 Sq. mm.	150	708/0.30	-	1820	2525

Note : White Color Cables Available in 0.50 Sq. mm to 4.00 Sq. mm.



Industrial Flexible Round Cables



Heavy duty N.B.R. With H.O.F.R. Insulated multi core industrial power tools Cables up to 1100 V. (Color - Orange)

Conductor Area (Sq. mm.)	Current Carrying Capacity (AMPS)	Nos & Dia. Of wire	2 - CORE ROUND Price Per Meter	3 - CORE ROUND Price Per Meter
0.50 Sq. mm.	5	16/0.20	25	33
0.75 Sq. mm.	7	24/0.20	31	39
1.00 Sq. mm.	11	14/0.30	40	48
1.50 Sq. mm.	15	22/0.30	55	65
2.50 Sq. mm.	20	36/0.30	80	105



Flexible copper welding wire



Cabilex super flexible bright annealed copper conductor with NBR coated & HOFR insulated & HR film coated industrial welding cable as per ISI - 9857


Conductor Area (Sq. mm.)	Current Carrying Capacity (AMPS)	Nos & Dia. Of wire	Price Per Meter
10.00 Sq. mm.	105	318/0.20	155
16.00 Sq. mm.	120	509/0.20	235
25.00 Sq. mm.	160	796/0.20	355
35.00 Sq. mm.	230	1115/0.20	485
50.00 Sq. mm.	280	1589/0.20	730
70.00 Sq. mm.	400	2204/0.20	950




Conductor : E.C. Grade Annealed Staranded Copper per ASTM B-172 Class M HR film Coated.
 Features : Resistant to oil, Weather, Sunlight, Ozon, Chemicals, Less Abrasion etc.
 Color Code : Orange



Aluminium Cable Detail

				
<p>Cabilex make solid aluminium conductor PVC insulated unarmoured round & flat cables heavy duty as per IS 694</p>				
Price Per Meter				
Size	2-C ROUND	3-C ROUND	4-C ROUND	2-C FLAT
2.50 mm	20	29	35	16
4.00 mm	28	40	56	21
6.00 mm	38	58	71	28
10.00 mm	52	75	95	42



Aluminium Cable Detail

 				
<p>Cabilex make standard aluminium conductor power cables, cores are paired & layed up in sequences & in layers to achieve attination levels, PVC insulated unarmoured heavy duty as per IS 694</p>				
Price Per Meter				
	Size	3-C ROUND	3.5 - C ROUND	4-C ROUND
	16.00 mm	160	170	185
	25.00 mm	205	261	275
	35.00 mm	290	320	360
	50.00 mm	380	450	510

Also Available in Drum Packing Above 300 mtr.



Anti Rodent



Anti Insect

General User Guideline

- At the time of acceptance & prior to installation please refer to meter marking, size & tag of the cable.
- Overall cables diameter is in mm.
- Cross sectional area of conductor is in mm²
- Please consider the length & weather temperature prior to selection of cable size.

3-CORE, 4-CORE COPPER ROUND CABLES
SIZE : 70.00 SQ. mm to 300 sq. mm &
3-CORE, 3.5-CORE, 4-CORE ROUND ALUMINIUM CABLES
SHEATHED & ARMOURED IS IN UNDER PROCESS

- More than 99.97 % copper & aluminium metal purity is used for conductor.
- Conductor is made of solid electrolytic grade.
- High current carrying capacity, maximum operating voltage.
- Special grade virgin FR - PVC compound for insulation.
- We are using automatic online PVC diameter control technology.
- Ant - rodent & anti - termit properties are available on request.
- Our outer sheathing color is black.



Notes :

- Excise duty : 12.50 %.
- CST : Against "c" form 2% or extra as applicable.
- Octroi/LBT and any other : Will be paid by buyer.
- This price list is subject to changes without prior notice.
- Subject to morbi jurisdiction.
- Due to continuous product development technical specification are subject to changes.

COLOURS



MULTI-LAYERED FIRE RESISTANT WIRES & CABLES



CABLEX CABLES PVT.LTD.

Morbi-Rajkot Highway, Survey No.307,
At.Lajai, Dis.Morbi - 363 641. (Gujarat) INDIA.
Tel. : +91 - 2822 - 285385

Contact Us : +91-99786 44048

E-mail. cablexcables@gmail.com
E-mail. info@cablexcables.com
Web. www.cablexcables.com



DEALER :



An award winner of
quality mark in 2016

IS : 694



CM/L - 7600038010



FIRE RETARDANT



EUROPEAN
CONFORMITY



RECYCLE